




- Innendørs/utendørs kabel
- Leveres som OM1, OM2, OM3 og OM4
- 2-12 fiber
- Flammehemmende
- Halogenfri
- Fast kledning 900 um

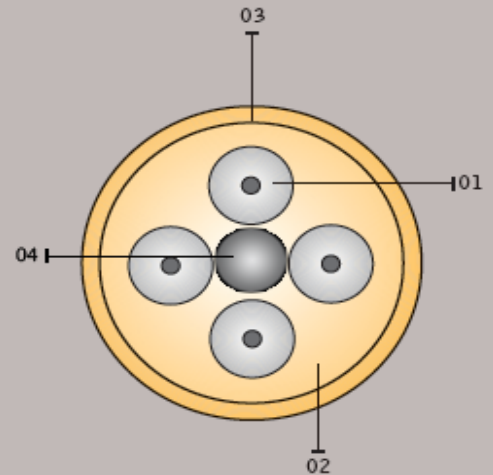

1. Tight buffer fibre
2. Dielectric armor
3. Outer thermoplastic jacket
4. Central Element

Standarder:

Environmental and mechanical tests according to EN 187000 and CEI 60794.
 Fire test according to: UNE-EN 50266 (IEC 60332-3)
 / UNE-EN 50267 (IEC 60754-1) / UNE-EN 50268 (IEC 61034-1/2)

Spesifikasjoner				
Antall fiber	2	4	8	12
Styrkeelement	Forsterket fiberglass garn WB(waterblocking)			
Ytterkappe	Termoplastisk LSZH 2			
Vekt (kg/km)	32	35	50	55
Diamteter (mm)	6,0 ± 0,3	6,0 ± 0,3	6,7 ± 0,3	7,2 ± 0,3
Strekstyrke	650N		850N	
Temp. toleranse	-20° til +70° C			
Min. bøyradius	20x diameter			

AXAI Multimodus

2 fiber OM1 62,5 AXAI	10 206 17
4 fiber OM1 62,5 AXAI	10 206 18
8 fiber OM1 62,5 AXAI	10 206 20
12 fiber OM1 62,5 AXAI	10 206 21
2 fiber OM2 50/125 AXAI	10 206 23
4 fiber OM2 50/125 AXAI	10 206 24
8 fiber OM2 50/125 AXAI	10 206 26
12 fiber OM2 50/125 AXAI	10 206 27
2 fiber OM3 50/125 AXAI	10 206 29
4 fiber OM3 50/125 AXAI	10 206 30
8 fiber OM3 50/125 AXAI	10 206 32
12 fiber OM3 50/125 AXAI	10 206 33