


# Central Tube, Singelmodus



## Beskrivelse

- Loose Tube kabel til bruk inne og ute.
- Flammehemmende og halogenfri.
- Kompakt kabel
- Rottesikker

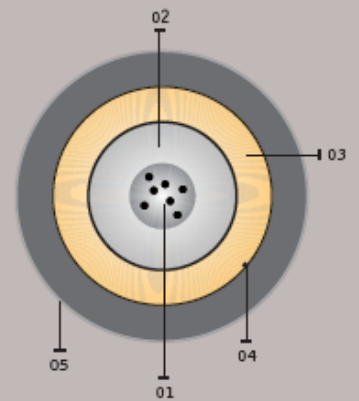

01. OPTICAL FIBRES  
 02. CENTRAL TUBE (JELLY FILLED)  
 03. FIBERGLASS REINFORCEMENTS WB  
 04. OUTER THERMOPLASTIC JACKET

## Standarder:

Environmental and mechanical tests according to EN 187000 and CEI 60794. Fire test according to: UNE-EN 50266 (IEC 60332-3) / UNEEN 50267 (IEC 60754-1) / UNE-EN 50268 (IEC 61034-1/2).

Spesifikasjoner		
Antall fiber	12	24
Styrkeelement	Forsterket fiberglass WB	
Ytterkappe	Termoplastisk LSZH 1	
Vekt (kg/km)	53	60
Diamteter (mm)	7,0 ± 0,3	7,9 ± 0,3
Strekstyrke	1000 N	
Temp. toleranse	-30° til +70° C	
Min. bøyradius	20x diameter	